


**ACRYLIC FIBRE IMPREGNATED WITH GRAPHITE
 BRAIDED PACKING**

UNIPAC 15

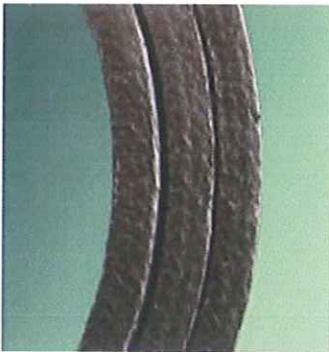

Made from reinforced acrylic fibre, each strand of yarn is sealed off with a special grade of fine graphite flakes. In addition, a final coating of graphite is given to final product prior to its being squared.

A direct replacement for graphited asbestos packing

Performance					
Temp (°C)	Press(Mpa)			Speed (m/s)	PH
	Pump	Recipro- Pump	Valve		
260	4	10	15	10	2~12
Main applications					
Pump	Recipro.Pump	Mixer	Valve	● 1 st Recommendation	
○	●	●	●	○ 2 nd Recommendation	

The Uni-Pac range of high quality performance compression packing's are designed to provide a seal between a moving spindle or shaft and the pressurized housing in which it operates.

Uni-Pac utilizes the most advanced production techniques and materials to ensure a high integrity seal is achieved even in the most demanding of industries. They are typically used on valve, rotary and reciprocating pumps.

Uni-Pac packing is available in a range of materials and is supplied in square section from 3mm to 25mm as standard with other sizes available on request. Standard boxes are supplied in 8 metres, with Unipac 7 and Unipac 10 also available in 1 metre handy packs.

As the company's products are used for multiplicity of purposes, and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose.

Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company.